

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
9 September 2005 (09.09.2005)

PCT

(10) International Publication Number
WO 2005/083223 A1

(51) International Patent Classification⁷: **E06C 7/44**

(21) International Application Number:
PCT/AU2005/000275

(22) International Filing Date: 28 February 2005 (28.02.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2004900964 26 February 2004 (26.02.2004) AU

(71) Applicant and

(72) Inventor: STEWART, Melvin Mackenzie [AU/AU]; 55 Eacham Road, Yungaburra North, QLD 4872 (AU).

(74) Agent: FISHER ADAMS KELLY; Level 13 AMP Place, 10 Eagle Street, Brisbane, QLD 4000 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LADDER STABILISER

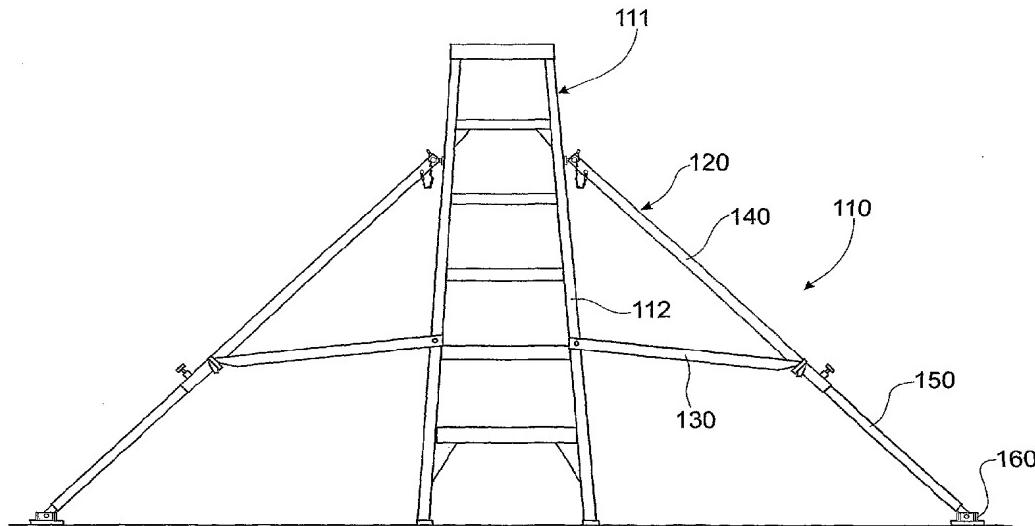

WO 2005/083223 A1

(57) Abstract: A ladder stabiliser (110) for stabilizing a ladder (111) comprising an arm member (120) attachable to the ladder, the arm member including a body (140), a leg (150) and a foot (160); said leg being movable telescopically with respect to the body; said foot being attached adjacent to an end of the leg; and movable with respect to the leg; and a brace (130) attached to the arm member and attachable to the ladder; wherein a pivot is attached to the end of the arm member to pivotally mount the ladder stabiliser to a ladder.